



## PD Firmware Upgrade

To prepare for the firmware upgrade, do the following:

1. Connect the USB-C Host Port to the host via the USB-C cable.
2. Run the downloaded Firmware Upgrade Package file from your computer by double clicking the file.
3. A second file appears, double click it and follow the instructions to start the firmware upgrade.



4. Wait for the firmware upgrade process to complete. When two Burn Pass appears, the firmware upgrade is successful.

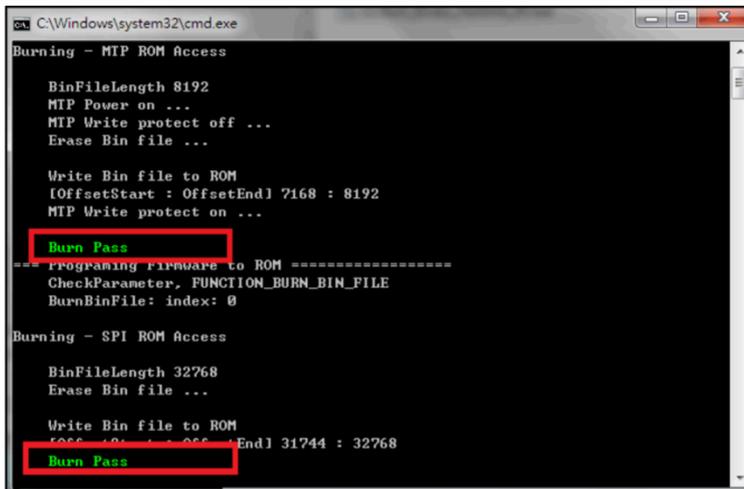A screenshot of a Windows command prompt window titled "C:\Windows\system32\cmd.exe". The window shows the output of a firmware upgrade process. The text is as follows:

```
Burning - MTP ROM Access  
BinFileLength 8192  
MTP Power on ...  
MTP Write protect off ...  
Erase Bin file ...  
  
Write Bin file to ROM  
[OffsetStart : OffsetEnd] 7168 : 8192  
MTP Write protect on ...  
Burn Pass  
-----  
Programming Firmware to ROM -----  
CheckParameter, FUNCTION_BURN_BIN_FILE  
BurnBinFile: index: 0  
  
Burning - SPI ROM Access  
  
BinFileLength 32768  
Erase Bin file ...  
  
Write Bin file to ROM  
[OffsetStart : OffsetEnd] 31744 : 32768  
Burn Pass
```

The two instances of "Burn Pass" are highlighted with red rectangular boxes.

5. Power off the GUC3C4HP by unplugging the USB-C cable from the host, and/ or unplug the USC-C cable connected to the USB-C DC-in Port from USBC power adapter.
6. Now power back on the GUC3C4HP.