

G2LU3CDP12

## USB-C to DisplayPort 4K Cable, 6.6 Ft (2m)



- Easily connects a USB-C/Thunderbolt 3 laptop/tablet\* to a 4K DisplayPort display
- Enjoy brilliant 4K Ultra HD video at resolution up to 3840 x 2160 @60Hz
- Supports Dolby True-HD and DTS HD lossless multi-channel audio
- High speed data rates up to 5.4Gbps
- A single cable solution - no additional cables needed

### Connect a USB-C Laptop or Tablet to a DisplayPort Display

The USB-C to DisplayPort 4K Cable easily connects your USB-C laptop or tablet to a DisplayPort display or projector. This single cable solution is all that is needed to expand your workspace visibility or to enjoy 4K video or photos and high-quality audio on your 4K Ultra HD display. Compatible with both Mac and PCs, and the newest iPad Pro1, the IOGEAR USB-C to DisplayPort 4K Cable is as flexible as it is robust.


### Ultra HD Video

Appreciate brilliant 4K Ultra HD video content on a larger DisplayPort screen for a true home theater experience. The USB-C to DisplayPort 4K Cable provides video resolutions up to 3840 x 2160 @60Hz with support for the latest High Dynamic Range (HDR) video content, ensuring crisp, vivid picture quality.

- Easily connects a USB-C/Thunderbolt 3 laptop/tablet<sup>1</sup> to a 4K DisplayPort display
- Enjoy brilliant 4K Ultra HD video at resolution up to 3840 x 2160 @60Hz
- Supports Dolby True-HD and DTS HD lossless multi-channel audio
- High speed data rates up to 5.4Gbps
- A single cable solution - no additional cables needed
- Supports High Dynamic Range (HDR) video content
- Works with the newest USB-C iPad Pro in mirror-mode

<sup>1</sup>Laptops and tablets with USB-C DP Alt Mode supported



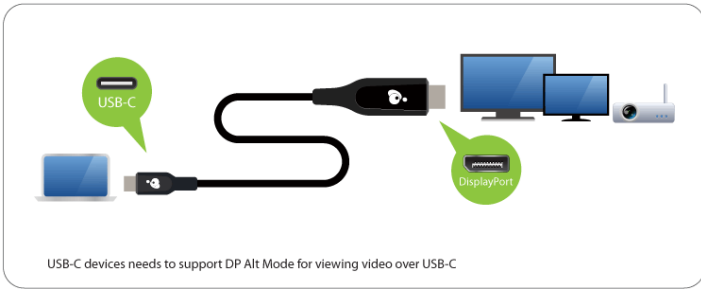

**Requirements**

**Package Contents**

- USB-C (Thunderbolt 3 compatible) device with DP Alt Mode support
- DisplayPort enabled Display / Monitor
- 1 x G2LU3CDP12
- 1 x Warranty Card

**Specifications**

Function	G2LU3CDP12	Dimensions	G2LU3CDP12
<b>Cable Length</b>	6.6ft (2m)	<b>Unit Dimensions</b>	
<b>Connectors (Input)</b>	USB-C Male	Length	6.6ft (2m)
<b>Connectors</b>		<b>Inner Pack</b>	
Video Output	DisplayPort 1.2 Male	Width	4.80" (12.2cm)
<b>Video Resolution</b>	Up to 4Kx2K @ 60Hz	Height	6.1" (15.5cm)
<b>Data Rate</b>	Supports per lane data rates of 5.4Gbps (HBR2), 2.7Gbps (HBR) and 1.62Gbps (RBR)	Length	7.48" (19cm)
<b>Environment</b>		Inner Pack Qty.	6
Humidity	10% to 85 % RH (no condensation)	<b>Unit Package Dimensions</b>	
Operation Temperature	32 degree Fahrenheit to 113 degree Fahrenheit	Width	1.18" (3cm)
Storage Temperature	14 degree Fahrenheit to 158 degree Fahrenheit	Height	5.71" (14.5cm)
<b>Operating System Requirements</b>		Length	4.33" (11cm)
Mac	Mac OS X 10.7+	<b>Master Carton</b>	
Windows	Windows 7 / 8 / 8.1 / 10	Width	15.75" (40cm)
		Height	6.89" (17.5cm)
		Depth	10.24" (26cm)
		Master Carton Qty.	24
		<b>Weight</b>	
		Master Carton Wt.	8.1lb (3.7kg)
		Inner Pack Wt.	1.76lb (0.8kg)
		Unit Pack Wt.	0.25lb (0.11kg)
		Unit Wt.	0.15lb (0.068kg)