


- Control and share 2 USB-C devices with DP Alt Mode from one keyboard, mouse, and a DisplayPort monitor.
- Resolution up to 4K UHD 3840 x 2160 @60Hz
- Two additional USB peripheral ports built in for more USB connectivity
- Video DynaSync - Optimizes resolution when switching among different sources and eliminates boot-up display problems.
- USB 3.2 Gen 1 compliant and up to 5 Gbps data transfer rates
- Support Power Delivery 3.0 up to 100W USB PD charging on Port 1 with additional USB-C Power Supply (Sold separately)
- Plug-n-Play; no software or driver needed.
- Supports USB-C/Thunderbolt 4 host device with DP Alt Mode
- Supports DP 1.4 Alt Mode



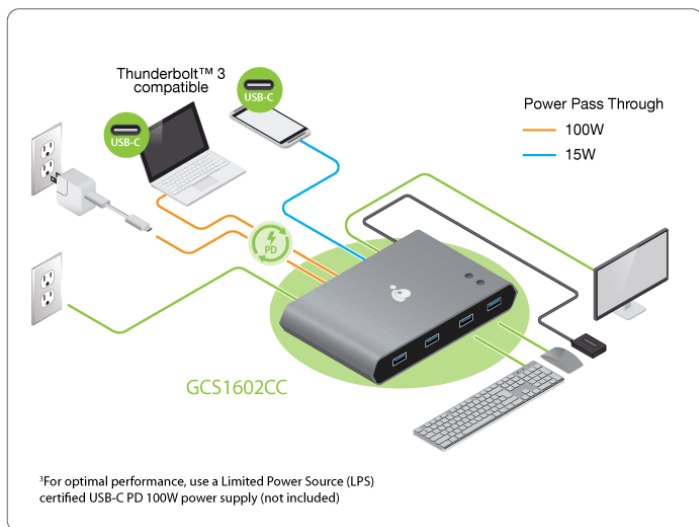

Requirements

Console:

- DisplayPort monitor
- Standard 104-key wired USB keyboard
- Standard 3 button wired USB mouse

Computers:

- USB-C enabled computer with DP Alt Mode*

Operating Systems

Windows® 10, 11
Mac OS X 10.12+
iPadOS 13.1 or later
Android 8+

Package Contents

- 1x 2-Port USB-C KVM Switch
- 2x USB-C to USB-C Cables
- 1x Remote Port Selector
- 1x Power Adapter
- 1x Quick Start Guide
- 1x Warranty Card

Specifications

Function	GCS1602CC	Dimensions	GCS1602CC
Upstream Port		Unit Dimensions	
USB-C	2x USB-C for Laptops; data rate up to 5Gbps	Height	1 in. (2.54cm)
Downstream Port		Length	5.6 in. (14.22cm)
DisplayPort	1x DP 1.4 compliant, up to 4k60Hz	Width	4.7 in. (11.93cm)
USB-A	4x USB-A 3.2 Gen 1, data rate up to 5Gbps	Unit Package Dimensions	
Power		Height	6.8 in. (17.3 cm)
Power Delivery Pass-Thru	Port 1: Supports 100W USB-C PD laptop charging at 5V, 9V, 15V, and 20V output2 Port 2: Supports max. 5V, 3A output	Length	11.2 in (28.3 cm)
Input Rating	DC12V, 3.3A	Width	2.5 in. (6.2 cm)
Operating System Requirements		Master Carton	
Mac	Mac OS® X 9.0+	Height	7.6 in. (19.4 cm)
Windows	Windows® 10, 11 (32-bit / 64-bit) with 7th-Gen Intel Core Processor or above	Length	15.8 in. (40.2 cm)
Android	Android 8+	Width	11.8 in. (30 cm)
iOS	iPadOS 13.1 or later	Master Carton Qty.	6
Environment		Weight	
Humidity	0?80% RH, Non-condensing	Master Carton Wt.	15.3 lb. (6.9 kg)
Operation Temperature	32 - 104°F (0?40°C)	Unit Pack Wt.	2.3 lb. (1.02 kg)
Storage Temperature	-4 - 140°F (-20?60°C)	Unit Wt.	.75 lbs (.34 kg)