


- Control and share 2 USB-C devices with DP Alt Mode from one keyboard, mouse, and a DisplayPort monitor.
- Resolution up to 4K UHD 3840 x 2160 @60Hz
- Two additional USB peripheral ports built in for more USB connectivity
- Video DynaSync Optimizes resolution when switching among different sources and eliminates boot-up display problems.
- USB 3.2 Gen 1 compliant and up to 5 Gbps data transfer rates
- Support Power Delivery 3.0 up to 100W USB PD charging on Port 1 with additional USB-C Power Supply (Sold separately)
- Plug-n-Play; no software or driver needed.
- Supports USB-C/Thunderbolt 4 host device with DP Alt Mode
- Supports DP 1.4 Alt Mode









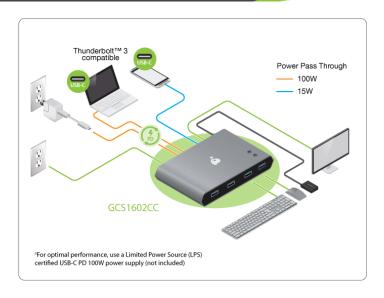

Requirements

Console:

- -DisplayPort monitor
- -Standard 104-key wired USB keyboard
- -Standard 3 button wired USB mouse

Computers:

-USB-C enabled computer with DP Alt Mode*

Operating Systems

Windows® 10, 11 Mac OS X 10.12+ iPadOS 13.1 or later Android 8+

Package Contents

- 1x 2-Port USB-C KVM Switch
- 2x USB-C to USB-C Cables
- 1x Remote Port Selector
- 1x Power Adapter
- 1x Quick Start Guide
- 1x Warranty Card

Specifications

Function	GCS1602CC	Dimensions	GCS1602CC
Upstream Port		Unit Dimensions	
USB-C	2x USB-C for Laptops; data rate up to 5Gbps	Height	1 in. (2.54cm)
Downstream Port		Length	5.6 in. (14.22cm)
DisplayPort	1x DP 1.4 compliant, up to 4k60Hz	Width	4.7 in. (11.93cm)
USB-A	4x USB-A 3.2 Gen 1, data rate up to 5Gbps	Unit Package Dimensions	
Power		Height	6.8 in. (17.3 cm)
Power Delivery Pass-Thru	Port 1: Supports 100W USB-C PD laptop charging at 5V, 9V, 15V, and 20V output2 Port 2: Supports max. 5V, 3A output	Length	11.2 in (28.3 cm)
		Width	2.5 in. (6.2 cm)
Input Rating	DC12V, 3.3A	Master Carton	
Operating System Requirements		Height	7.6 in. (19.4 cm)
Mac	Mac OS® X 9.0+	Length	15.8 in. (40.2 cm)
Windows	Windows® 10, 11 (32-bit / 64-bit) with 7th- Gen Intel Core Processor or above	Width	11.8 in. (30 cm)
Android	Android 8+	Master Carton Qty.	6
iOS	iPadOS 13.1 or later	Weight	
	adoc 13.1 of fater	Master Carton Wt.	15.3 lb. (6.9 kg)
Environment		Unit Pack Wt.	2.3 lb. (1.02 kg)
Humidity	0?80% RH, Non-condensing	Unit Wt.	.75 lbs (.34 kg)
Operation Temperature	32 - 104°F (0?40°C)		
Storage Temperature	-4 - 140°F (-20?60°C)		