IOGEAR®

GCS72MDPKIT

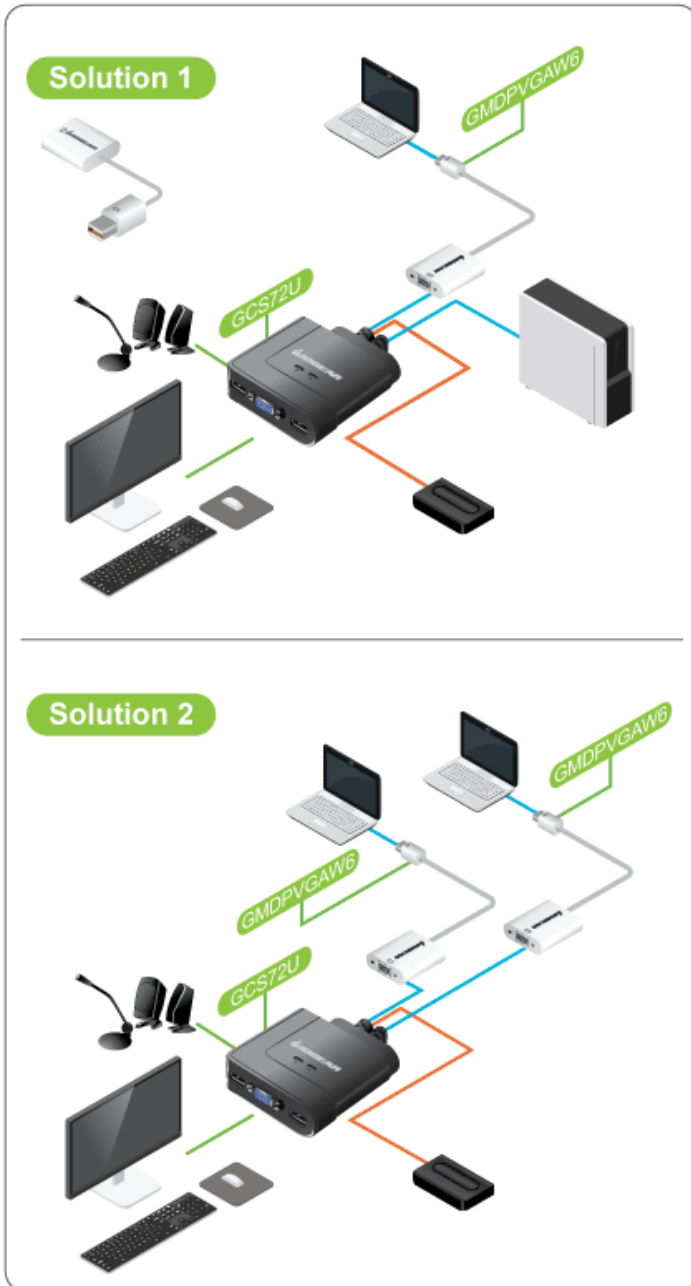# 2-Port USB VGA and Mini DisplayPort Cable KVM Kit

- Switch between two computers with the push of a button
- Offers the flexibility to mix and match computer connections: VGA and DisplayPort
- Includes 2 x DisplayPort to VGA adapters
- No external power needed
- Save Cabling Costs: All cables are included

2-Port Cable VGA / Mini DisplayPort KVM Switch

- Switch between two computers with the push of a button
- Offers the flexibility to mix and match computer connections: VGA and Mini DisplayPort
- Includes 2 x Mini DisplayPort to VGA adapters
- No external power needed
- Cost effective, Plug-N-Play solution

- Switch between two computers with the push of a button
- Offers the flexibility to mix and match computer connections: VGA and Mini DisplayPort
- Includes 2 x Mini DisplayPort to VGA adapters
- No external power needed
- Cost effective, Plug-N-Play solution
- One USB keyboard, USB mouse, and VGA monitor control two computers
- Max resolution: 2048 x 1536, DDC2B
- 2.1 Stereo audio and microphone support
- 3' long molded-in cables to simplify setup
- Compatible with PC, MAC and SUN operating platforms
- Supports Windows XP or higher, Mac OS 9.0 or higher, Sun Solaris 9 or higher
- Full Mac keyboard support

- Supports programmable mice
- All cables included
- 2 x Mini DisplayPort to VGA Adapters convert your Mini DisplayPort to VGA:
  - Works with Apple® iMac® or MacBook®
  - Compliant with Mini DisplayPort Specification 1.1a for both 1.62 Gbps and 2.7 Gbps
  - Support full Mini DisplayPort link tracking
  - Supported resolutions:
    - Full HD 1080p
    - 1920x1200
    - VGA, SVGA, XGA, SXGA and UXGA at 162 MHz pixel rate
  - Support interrupt request output for expansion function
  - Support Deep Sleep Mode (suspend mode)

Solution 1

GMDPVGAW6

GCS72U

Solution 2

GMDPVGAW6

GMDPVGAW6

GCS72U

Requirements

- **Console:**
- 1 x VGA display
- 1 x standard 104 key wired USB keyboard
- 1 x standard 2 or 3 button wired USB mouse
-
- **Computers:**
- VGA or Mini DisplayPort port
- USB ports
- 3.5mm audio port (optional)
-
- **Operating Systems:**
- Windows Vista®, Windows® 7, Windows® 8.1, Windows® 10
- Mac OS 9 to 10.x
- Oracle® Solaris
- Linux®, Unix and other USB supported systems*

*Additional drivers and support may be needed

Package Contents

- 1 x 2-Port USB Cable KVM
- 2 x Mini DisplayPort to VGA Adapters
- 1 x Quick Start Guide
- 1 x Warranty Card

IOGEAR®

Specifications

Function	GCS72MDPKIT
Computer Connections	
Direct	2
Console Connectors	
Monitor	VGA
Keyboard	USB
Mouse	USB
CPU Connectors	
Monitor	2 x VGA; 2 x Mini DisplayPort (with adapters)
Keyboard & Mouse	2 x USB
LEDs	
On Line	Green
Video Resolution	2048x1536 (VGA), 1920x1200 (with adapters)
Port Selection	Remote Pushbutton
Cable Type	Bonded USB KVM
Cable Length	2 x 3ft each
Housing	
Case	Plastic

Dimensions	GCS72MDPKIT
POP Information	
10" Peg Hook	4
6" Peg Hook	2
Unit Dimensions	
Height	6" (15.24cm)
Depth	7" (17.78cm)
Length	2" (5.08cm)
Unit Package Dimensions	
Width	6.25" (15.87cm)
Height	8.87" (22.54cm)
Depth	2.25" (5.72cm)
Master Carton	
Width	8" (20.32cm)
Height	7" (17.78cm)
Depth	15.25" (38.74cm)
Master Carton Qty.	6
Weight	
Master Carton Wt.	7.52lb (3.42kg)
Unit Pack Wt.	1.14lb (0.52kg)
Unit Wt. w/accessories	0.92lb (0.42kg)
Unit Wt.	0.82lb (0.37kg)