

GTR360

## Thunderbolt 3 6-Slot SD Card Reader (TAA Compliant)



- Ideal for photographers & digital media pros
- Connect & access any 6 SD cards simultaneously
- Ultra-high-speed data transfer rates up to 40 Gbps
- Card slot LED indicator
- Support SD 4.0 & UHS II

### Read 6 SD Cards Simultaneously

IOGEAR's Thunderbolt 3 TAA Compliant 6-Slot SD Card Reader offers simultaneous access to six memory cards through a single, ultra-high-speed cable. The Card Reader is an excellent companion for photographers and videographers or other professionals who use multiple SD cards for digital storage while on-the-go.

### Turbo Charged SD Card - UHS-II & SD 4.0


The Thunderbolt 3 Card Reader supports the newest professional cameras through its SD card 4.0 compliance and UHS-II ultra-high speed slots. The Reader is capable of read/write speeds of up to 312/260 Mbps respectively, which is nearly 3Xs the performance of a UHS-I SD memory card to boost transfer speed and performance.

### Ultra-Fast File Transfers

Quickly connect your Thunderbolt 3-enabled MacBook Pro or tablet to access and transfer files to and from multiple SD cards with data transfer speeds reaching 40 Gbps. The Card Reader is also compatible with any Thunderbolt 3-equipped laptop or tablet and transfers files at speeds up to 40 Gbps.

- Ideal for photographers & digital media pros
- Connect & access any 6 SD cards simultaneously
- Ultra-high-speed data transfer rates up to 40 Gbps
- Card slot LED indicator
- Support SD 4.0 & UHS II
- TAA compliant



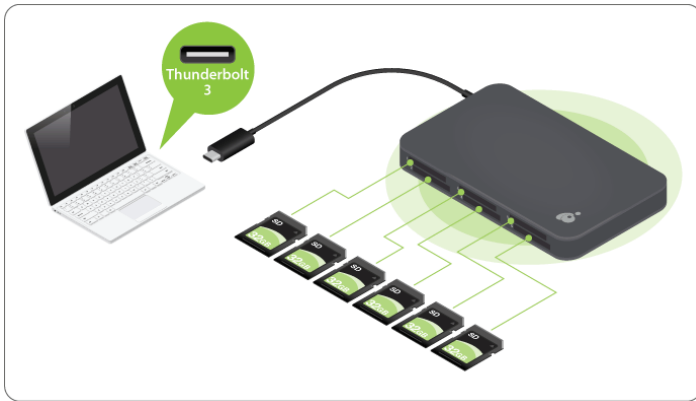

### Requirements

- Thunderbolt 3 enabled system
- Windows 10 and above
- Mac OS X 10.12 +

### Package Contents

- GTR360 x 1
- Warranty Card x 1

## Specifications

Function	GTR360	Dimensions	GTR360
<b>Upstream Port</b>		<b>Unit Dimensions</b>	
Thunderbolt	Thunderbolt 3	Height	3.23" (8.2cm)
<b>Downstream Port</b>		Length	5.31" (13.5cm) + 7.3" (18.5cm) tethered cable
Card Reader	6 x SD 4.0 card slot (Supports SD/SDHC/SDXC/non-UHS/UHS-I/UHS-II)	Depth	0.61" (1.54cm)
<b>Transfer Rate</b>	Read: 320 MB/s; Write: 270 MB/s per slot	<b>Inner Pack</b>	
<b>Storage Temperature</b>	-20 ~ 60 Celcius	Height	6.30" (12cm)
<b>Operating Temperature</b>	0 ~ 60 Celcius	Length	8.27" (21cm)
<b>Environment</b>		Width	8.27" (21cm)
Humidity	<90% RH	Inner Pack Qty.	6
<b>Power Adapter</b>	Bus-powered	<b>Unit Package Dimensions</b>	
<b>LEDs</b>		Height	1.18" (3cm)
Data	Blue; LED will flash when accessing/reading/writing data	Length	7.83" (19.9cm)
<b>Operating System Requirements</b>		Width	5.39" (13.7cm)
Windows	Windows 10 and above	<b>Master Carton</b>	
Mac	Mac OS X 10.12+	Height	13.78" (35cm)
		Width	17.52" (44.5cm)
		Depth	17.13" (43.5cm)
		Master Carton Qty.	48
		<b>Weight</b>	
		Master Carton Wt.	26.99lb (12.24kg)
		Inner Pack Wt.	3.42lb (1.55kg)
		Unit Pack Wt.	0.57lb (0.26kg)
		Unit Wt.	0.30lb (0.14kg)