

GUC3C3H

USB-C to HDMI / USB Multiport Adapter

The all-in-one adapter that lets you connect the only USB-C port of your laptop to an HDMI display, while also connecting a standard USB device and a USB-C charging cable.



Get More Out Of Your USB-C Port

This all-in-one adapter allows customer to easily output 4K video via HDMI and add a USB Type-A port while powering their laptop up to 60W. If the USB-C port is not utilized, it can become a standard USB-C port for use with any USB-C peripheral device such as a hub, Ethernet adapter, card reader and more.

1. PD (Power Delivery) Pass-Thru

No need to worry about running out of power while using your USB-C port. Connect your laptop's original USB-C charger to the multiport adapter and charge your laptop while you work or play. Providing up to 60w of power, your laptop will charge at the fast rate you expect from USB-C.

- Expand your USB-C port to HDMI, USB-C and USB Type-A port
- 4K Video Resolution of up to 3840 x 2160@30HZ
- Supports USB-C Power Delivery up to 60W*
- USB-C downstream port x 1 (5Gbps)
- USB Type-A port x 1 (5Gbps)
- Compatible with Thunderbolt 3 (USB-C)

- DP (DisplayPort) ALT Mode1
- ¹Compatible with DP ALT mode supported USB-C and Thunderbolt 3 (USB-C) laptops
- * Power Delivery pass-through requires USB-C charger from your laptop. A total of up to 52.5W can be charged to the laptop after deduction of 7.5W is used by the dock.
- ** Pass-thru power delivered to the laptop is dependent upon the capacity of your USB-C power supply.
- Ex. If your USB-C power supply is 60W, then the maximum power can be delivered to the laptop is 60W-7.5W = 52.5W.


Regardless of the capacity of your USB-C power supply, the maximum power can be delivered to your laptop is 52.5W.









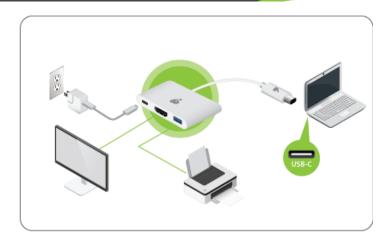

Requirements

Package Contents

- Computer
- Windows and Mac USB-C Enabled Computers
- DP (DisplayPort) ALT Mode Support
- 1 x GUC3C3H
- 1 x Warranty Card



Specifications

Function	GUC3C3H	Dimensions	GUC3C3H
Upstream Port		POP Information	
USB-C	Built-in USB 3.1 G1 Type-C cable	10" Peg Hook	6
Downstream Port		6" Peg Hook	4
USB-A	1 x USB-A 3.0	Unit Dimensions	
USB-C	1 x USB-C for Power Delivery Pass-through or data transfer	Height	0.6" (1.5 cm)
HDMI	Up to 3840x2160 @30Hz	Depth	1.6" (4 cm)
Power	Op to 3040A2100 @30H2	Length	2.4" (6 cm)
Power Delivery Pass-Thru	60W (A total of up to 45W can be charged to the laptop after deduction of max 15W used by the dock)	Inner Pack	
		Width	7.7" (19.5 cm)
Operating System Requirements	-,	Height	6.1" (15.5 cm)
Windows	Windows 7/8/8.1/10	Length	4.7" (12 cm)
Mac	Mac OS X 10.7 +	Inner Pack Qty.	6
		Unit Package Dimensions	
		Width	4.33" (11 cm)
		Height	5.7" (14.5 cm)
		Depth	1.2" (3 cm)
		Master Carton	
		Width	16.2" (41 cm)
		Height	7" (18 cm)
		Depth	6.3" (16 cm)
		Master Carton Qty.	24
		Weight	
		Master Carton Wt.	5.8 lb (2.6 kg)
		Inner Pack Wt.	1.2 lb (0.5 kg)
		Unit Pack Wt.	0.2 lb (0.09 kg)
		Unit Wt.	0.05 lb (0.02 kg)