

GUC3CDP

## USB Type-C to DisplayPort Adapter



### USB-C to DisplayPort Adapter


IOGEAR's new USB Type-C to DisplayPort adapter is the ideal hardware solution to convert a USB-C connection to a DisplayPort video output. This adapter gives you the ability to connect your USB-C based device like the Apple® MacBook®, Google® Chromebook Pixel™ and the Nokia™ N1 Tablet to any DisplayPort based display, projector or HDTV.

### USB Type-C - The Next Break Through in Connectivity

USB-C is the latest advancement in the consumer electronics industry for device connectivity. Supporting a universal connectivity standard, USB-C unites all of your core functions into one powerful port. Thanks to its versatile design, compact footprint and unparalleled performance, USB-C connections are featured on next generation ultra-portable devices like the Apple® MacBook™, Google® Chromebook Pixel™ and Asus® ZenPad tablets.

- Connect your USB Type-C based Notebook, Ultrabook or Tablet to a DisplayPort based display or projector
- Compatible with the latest USB Type-C based desktops, notebooks and tablets including Apple® MacBook®, Chromebook™ Pixel and the Nokia N1 tablet
- Supports Video Resolutions of up to 3840 x 2160
- Reversible USB Type-C connector ensures proper operation regardless of how the adapter is connected
- Compliant with DisplayPort Specification 1.2 Alternate Mode
- USB Bus Powered - No external power adapter necessary
- Supports Plug-N-Play; No drivers or software installation necessary
- USB 3.1 Gen 1 Compliant
- HDCP Compliant
- Works with the new USB-C iPad Pro under mirror-mode



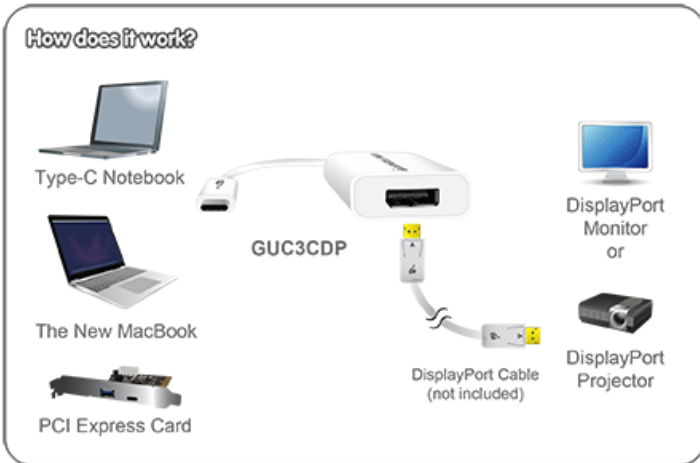

**Requirements**

**Package Contents**

- |                                                                                                                                                       |                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>• Input<br/>1 x USB Type-C Source</li><li>• Output<br/>1 x Projector or Display with DisplayPort Port</li></ul> | <ul style="list-style-type: none"><li>• 1 x USB Type-C to DisplayPort Adapter</li></ul> |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|

**Operating System Requirements**

- Windows 10
- Mac OS X 10.10.5+
- Google Chrome OS

## Specifications

Function	GUC3CDP	Dimensions	GUC3CDP
<b>Connectors (Input)</b>	USB Type-C (Male)	<b>Unit Dimensions</b>	
<b>Video connections</b>		Height	1.5" (3.8cm)
Output	DisplayPort (Female)	Depth	0.625" (1.6cm)
<b>Video Resolution</b>	Up to 3840x2160 @ 30fps	Length	7.25" (18.4cm)
<b>Data Rate</b>	Up to 5.4Gbps (Per Lane)	<b>Inner Pack</b>	
<b>USB Specification</b>	USB 3.1 Gen 1	Width	4.375" (11.1cm)
<b>Power Supply</b>	USB Bus-Powered	Height	3.75" (9.5cm)
<b>Environment</b>		Length	10.75" (27.3cm)
Humidity	5% to 90% RH (No Condensation)	Inner Pack Qty.	12
Operation Temperature	32°-113°F (0°- 45°C)	<b>Unit Package Dimensions</b>	
Storage Temperature	14°-176°F (-10°- 80°C)	Width	4" (10.2cm)
<b>Warranty</b>	Limited Lifetime	Height	10.5" (26.7cm)
		Depth	0.625" (1.6cm)
		<b>Master Carton</b>	
		Width	9.625" (24.4cm)
		Height	8.125" (20.6cm)
		Depth	11.375" (28.9cm)
		Master Carton Qty.	48
		<b>Weight</b>	
		Master Carton Wt.	4.45lb (2.02kg)
		Inner Pack Wt.	0.95lb (0.42kg)
		Unit Pack Wt.	0.05lb (0.02kg)
		Unit Wt.	0.05lb (0.02kg)