

GUC3CDP

USB Type-C to DisplayPort Adapter



USB-C to DisplayPort Adapter


IOGEAR's new USB Type-C to DisplayPort adapter is the ideal hardware solution to convert a USB-C connection to a DisplayPort video output. This adapter gives you the ability to connect your USB-C based device like the Apple® MacBook®, Google® Chromebook Pixel™ and the Nokia™ N1 Tablet to any DisplayPort based display, projector or HDTV.

USB Type-C - The Next Break Through in Connectivity

USB-C is the latest advancement in the consumer electronics industry for device connectivity. Supporting a universal connectivity standard, USB-C unites all of your core functions into one powerful port. Thanks to its versatile design, compact footprint and unparalleled performance, USB-C connections are featured on next generation ultra-portable devices like the Apple® MacBook™, Google® Chromebook Pixel™ and Asus® ZenPad tablets.

- Connect your USB Type-C based Notebook, Ultrabook or Tablet to a DisplayPort based display or projector
- Compatible with the latest USB Type-C based desktops, notebooks and tablets including Apple® MacBook®, Chromebook™ Pixel and the Nokia N1 tablet
- Supports Video Resolutions of up to 3840 x 2160
- Reversible USB Type-C connector ensures proper operation regardless of how the adapter is connected
- Compliant with DisplayPort Specification 1.2 Alternate Mode
- USB Bus Powered - No external power adapter necessary
- Supports Plug-N-Play; No drivers or software installation necessary
- USB 3.1 Gen 1 Compliant
- HDCP Compliant
- Works with the new USB-C iPad Pro under mirror-mode



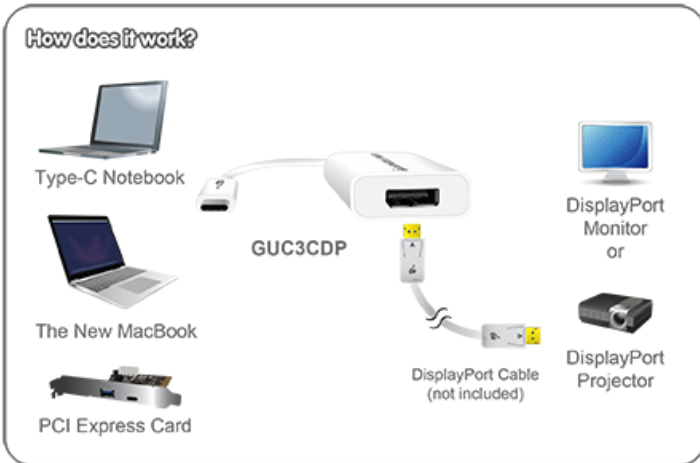

Requirements

Package Contents

- | | |
|---|---|
| <ul style="list-style-type: none">• Input
1 x USB Type-C Source• Output
1 x Projector or Display with DisplayPort Port | <ul style="list-style-type: none">• 1 x USB Type-C to DisplayPort Adapter |
|---|---|

Operating System Requirements

- Windows 10
- Mac OS X 10.10.5+
- Google Chrome OS

Specifications

Function	GUC3CDP
Connectors (Input)	USB Type-C (Male)
Video connections	
Output	DisplayPort (Female)
Video Resolution	Up to 3840x2160 @ 30fps
Data Rate	Up to 5.4Gbps (Per Lane)
USB Specification	USB 3.1 Gen 1
Power Supply	USB Bus-Powered
Environment	
Humidity	5% to 90% RH (No Condensation)
Operation Temperature	32°-113°F (0°- 45°C)
Storage Temperature	14°-176°F (-10°- 80°C)
Warranty	Limited Lifetime

Dimensions	GUC3CDP
Unit Dimensions	
Height	1.5" (3.8cm)
Depth	0.625" (1.6cm)
Length	7.25" (18.4cm)
Inner Pack	
Width	4.375" (11.1cm)
Height	3.75" (9.5cm)
Length	10.75" (27.3cm)
Inner Pack Qty.	12
Unit Package Dimensions	
Width	4" (10.2cm)
Height	10.5" (26.7cm)
Depth	0.625" (1.6cm)
Master Carton	
Width	9.625" (24.4cm)
Height	8.125" (20.6cm)
Depth	11.375" (28.9cm)
Master Carton Qty.	48
Weight	
Master Carton Wt.	4.45lb (2.02kg)
Inner Pack Wt.	0.95lb (0.42kg)
Unit Pack Wt.	0.05lb (0.02kg)
Unit Wt.	0.05lb (0.02kg)