

GUC3CHD

## USB Type-C to HDMI Adapter



### USB-C to HDMI Adapter

IOGEAR's new USB Type-C to HDMI adapter is the ideal hardware solution to convert a USB-C connection to a HDMI video output. This gives you the ability to connect your USB-C based device like the Apple® MacBook®, Google® Chromebook Pixel™ and the Nokia™ N1 Tablet to any HDMI based display, projector or HDTV.

### USB-C - The Next Break Through in Connectivity


USB-C is the latest advancement in the consumer electronics industry for device connectivity. Supporting a universal connectivity standard, USB-C unites all of your core functions into one powerful port. Thanks to its versatile design, compact footprint and unparalleled performance, USB-C connections are featured on next generation ultra-portable devices like the Apple® MacBook™, Google® Chromebook Pixel™ and Asus® ZenPad tablets.

### 4K Ultra High Definition (UHD) Video Resolution Support

The GUC3CHD USB Type-C to HDMI adapter supports the HDMI 1.4a standard for UHD (Ultra HD) video playback, with resolutions of up to 3840x2160. The result is the highest level of visual fidelity currently available on the consumer market for HDMI, giving you the ability to display 4K content from your USB-C equipped device on the latest UHD televisions, projectors and displays.

- Connect your USB Type-C based Notebook, Ultrabook or Tablet to an HDMI based display or projector
- Compatible with the latest USB Type-C based desktops, notebooks and tablets including Apple® MacBook®, Chromebook™ Pixel and the Nokia N1 tablet
- Supports Video Resolutions of up to 3840x2160
- Supports HDMI Audio Pass Through
- Reversible USB Type-C connector ensures proper operation regardless of how the adapter is connected
- Compliant with DisplayPort Specification 1.2 Alternate Mode
- USB Bus Powered - No external power adapter necessary
- Supports Plug-N-Play; No drivers or software installation necessary
- USB 3.1 Gen 1 Compliant
- HDCP Compliant



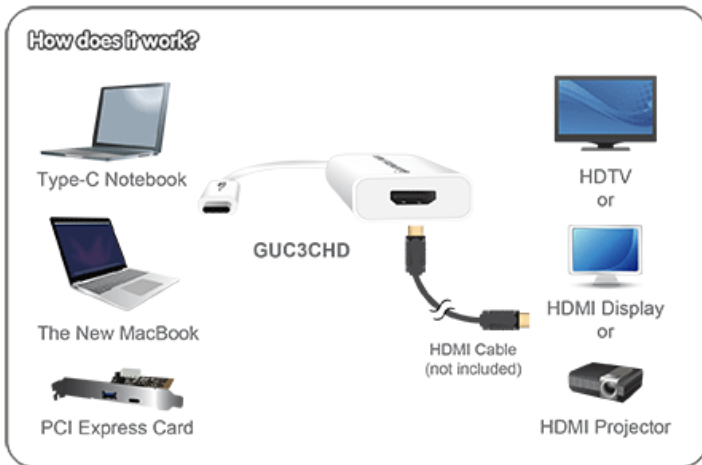

**Requirements**

**Package Contents**

- Input
    - 1 x USB Type-C Source
  - Output
    - 1 x Projector or Display with HDMI Port
  - Operating System Requirements
    - Windows 10
    - Mac OS X 10.10.5+
    - Google Chrome OS
- 1 x USB Type-C to HDMI Adapter

## Specifications

Function	GUC3CHD	Dimensions	GUC3CHD
<b>Connectors (Input)</b>	USB Type-C (Male; 24-Pin)	<b>Unit Dimensions</b>	
<b>Video connections</b>		Height	1.5" (3.8cm)
Output	HDMI Type-A (Female; 19-Pin)	Length	7.125" (18.1cm)
<b>Video Resolution</b>	Up to 3840x2160 @ 30fps	Depth	0.625" (1.6cm)
<b>Audio</b>		<b>Inner Pack</b>	
Audio Output	HDMI Audio Pass Through	Height	3.625" (9.2cm)
<b>Data Rate</b>	Up to 5.4Gbps (Per Lane)	Length	10.75" (27.3cm)
<b>USB Specification</b>	USB 3.1 Gen 1	Width	4.375" (11.1cm)
<b>Power Supply</b>	USB Bus-Powered	Inner Pack Qty.	12
<b>Environment</b>		<b>Unit Package Dimensions</b>	
Humidity	10% to 85% RH (No Condensation)	Height	10.5" (26.7cm)
Operation Temperature	32°-113°F (0°- 45°C)	Width	4" (10.2cm)
Storage Temperature	14°-176°F (-10°- 80°C)	Depth	0.625" (1.6cm)
<b>Warranty</b>	Limited Lifetime	<b>Master Carton</b>	
		Height	8" (20.3cm)
		Width	9.5" (24.1cm)
		Depth	11.5" (29.2cm)
		Master Carton Qty.	48
		<b>Weight</b>	
		Master Carton Wt.	3.3lb (1.5kg)
		Inner Pack Wt.	0.66 lbs (0.3kg)
		Unit Pack Wt.	0.05lb (0.02kg)
		Unit Wt.	0.05lb (0.02kg)