

GUC3CVGA

## USB Type-C to VGA Adapter



### USB-C to VGA Adapter

IOGEAR's new USB Type-C to VGA adapter is the ideal hardware solution to convert a USB-C connection to a VGA video output. This adapter gives you the ability to connect your USB-C based device like the Apple® MacBook®, Google® Chromebook Pixel™ and the Nokia™ N1 Tablet to any VGA based display, projector or HDTV.

### USB Type-C - The Next Break Through in Connectivity

USB-C is the latest advancement in the consumer electronics industry for device connectivity. Supporting a universal connectivity standard, USB-C unites all of your core functions into one powerful port. Thanks to its versatile design, compact footprint and unparalleled performance, USB-C connections are featured on next generation ultra-portable devices like the Apple® MacBook™, Google® Chromebook Pixel™ and Asus® ZenPad tablets.


### High-Resolution Video Support

The GUC3CVGA USB Type-C to VGA adapter supports video resolutions of up to 1920x1200 and Full HD 1080p video playback. The result is crystal clear imagery when needing to display presentations on a projector, reviewing documents on a high-resolution desktop monitor or playing back high-definition video on an HDTV.

- Connect your USB Type-C based Notebook, Ultrabook or Tablet to a VGA based display, projector or HDTV
- Compatible with the latest USB Type-C based desktops, notebooks and tablets including Apple® MacBook®, Chromebook™ Pixel and the Nokia N1 tablet
- Supports Video Resolutions of up to 1920x1200
- Reversible USB Type-C connector ensures proper operation regardless of how the adapter is connected
- Compliant with DisplayPort Specification 1.2 Alternate Mode
- USB Bus Powered - No external power adapter necessary
- Supports Plug-N-Play; No drivers or software installation necessary
- USB 3.1 Gen 1 Compliant
- HDCP Compliant
- Works with the new USB-C iPad Pro under mirror-mode



**How does it work?**

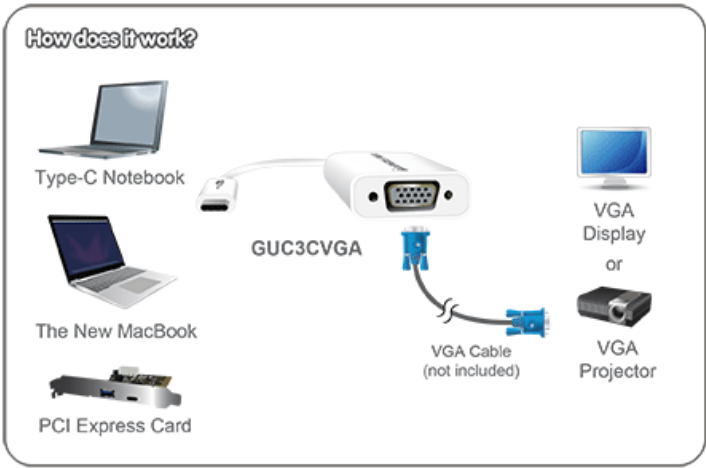

**Requirements**

**Package Contents**

- |   |   |
|---|---|
| <ul style="list-style-type: none"><li>• Input<ul style="list-style-type: none"><li>1 x USB Type-C Source</li></ul></li><li>• Output<ul style="list-style-type: none"><li>1 x Projector, Display or HDTV with VGA Port</li></ul></li></ul> | <ul style="list-style-type: none"><li>• 1 x USB Type-C to VGA Adapter</li></ul> |
|---|---|

## Specifications

Function	GUC3CVGA
<b>Connectors (Input)</b>	USB Type-C (Male; 24-Pin)
<b>Video connections</b>	
Output	VGA (Female; 15-Pin High Density D-Sub)
<b>Video Resolution</b>	Up to 1920x1200
<b>Data Rate</b>	Up to 5.4Gbps (Per Lane)
<b>USB Specification</b>	USB 3.1 Gen 1
<b>Power Supply</b>	USB Bus-Powered
<b>Environment</b>	
Humidity	10% to 85% RH (No Condensation)
Operation Temperature	32°-113°F (0°- 45°C)
Storage Temperature	14°-176°F (-10°- 80°C)
<b>Warranty</b>	Limited Lifetime

<b>Dimensions</b>	GUC3CVGA
<b>Unit Dimensions</b>	
Height	1.5" (3.8cm)
Depth	0.625" (1.6cm)
Length	7.25" (18.4cm)
<b>Inner Pack</b>	
Width	4.375" (11.1cm)
Height	3.625" (9.2cm)
Length	10.75" (27.3cm)
Inner Pack Qty.	12
<b>Unit Package Dimensions</b>	
Width	4" (10.2cm)
Height	10" (25.4cm)
Depth	0.625" (1.6cm)
<b>Master Carton</b>	
Width	9.5" (24.1cm)
Height	8" (20.3cm)
Depth	11.5" (29.2cm)
Master Carton Qty.	48
<b>Weight</b>	
Master Carton Wt.	4.7lb (2.14kg)
Inner Pack Wt.	1.0lb (0.46kg)
Unit Pack Wt.	0.05lb (0.02kg)
Unit Wt.	0.05lb (0.02kg)