

#### **GUD3C04PWRKIT**

# Access Pro<sup>™</sup> 2-Port USB-C KVM Switch with Power Adapter KIT



- 2-Port USB-C KVM Switch with Power Delivery
- Control and share 2 USB-C devices with DP Alt Mode from one keyboard, mouse, and an HDMI monitor
- Power Delivery<sup>1</sup> (USB-C external power needed) with up to 75W charging for laptop<sup>2</sup> and up to10W for smartphone<sup>3</sup>
- Supports USB-C/Thunderbolt\* 3 MacBook Air\*, MacBook Pro\*

iPad Pro\*, Windows\* &Android 8+ devices

 Resolution up to 4K UHD 3840 x 2160 @30Hz for USB-C laptops

## **USB-C KVM - Switch Between Two USB-C Devices**

Easily switch between two USB-C devices and control them with one keyboard, one mouse and view content on one 4K monitor. IOGEAR's Access Pro? 2-Port USB-C KVM Switch requires no software and comes complete with the Power Delivery function, Smart USB-C to USB-C 3.3 ft. cable with E-Marker, a 6-foot push-button remote switch and a 60W USB-C GaN power adapter.

Why spend extra money on features you don't need? The USB-C KVM offers the most efficient and affordable way to switch between two USB-C or Thunderbolt? 3-equipped Mac® computers, PCs, iPad® or Android? tablets and smartphones with a single-cable connection to each device without additional drivers or software.



- 2-Port USB-C KVM Switch with Power Delivery
- Control and share 2 USB-C devices with DP Alt Mode from one keyboard, mouse, and an HDMI monitor
- Power Delivery<sup>1</sup> (USB-C external power included) with up to 75W charging for laptop<sup>2</sup> and up to10W for smartphone<sup>3</sup>
- Includes 60W USB-C GaN charger (GPAWC60W) & USB-C to USB-C cable (G2LU3CCM01E)
- Supports USB-C/Thunderbolt 3 MacBook Air, MacBook Pro, iPad

Pro°, Windows° & Android 8+ devices

• Resolution up to 4K UHD 3840 x 2160 @30Hz for USB-C laptops

- Resolution up to 1080p @60 for USB-C tablets and smartphones
- Thunderbolt 3 laptop compatible
- USB 3.1 Gen1 supports data transfer rates up to 5 Gbps
- · Convenient switching between devices via a push-button remote
- Supports DeX<sup>®</sup> Mode<sup>4</sup> on Samsung USB-C smartphones
- Plug-n-Play; no software or driver needed
- HDCP 1.4 Compliant

#### Note:

<sup>1</sup>For optimal performance, Limited Power Source (LPS) certified USB-C power adapter

<sup>2</sup>Must be plugged into Primary USB-C port 1

<sup>3</sup>When plugged into Secondary USB-C port 2

<sup>4</sup>Samsung DeX Mode is only supported on Samsung Galaxy S8, S8+, S9,












• 1x GUD3C04

• 1x GPAWC60W

• 1x G2LU3CCM01E

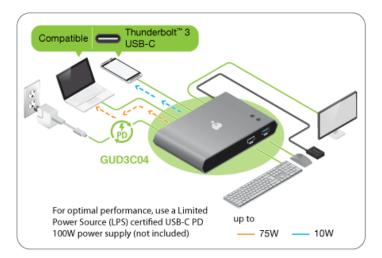

#### Requirements

### **Package Contents**

- · Sources:
  - USB-C enabled devices with DP-Alt Mode over USB-C
  - USB-C external power source (recommend a Limited Power Source (LPS) certified USB-C power adapter)
- Console:
  - HDMI monitor
  - Standard wired 104 keys USB keyboard
  - Standard wired 2 or 3-button USB mouse
- Operations:
  - Windows<sup>®</sup> 10 (32/64 bit)+
  - MacOS<sup>®</sup> X
    10.12+
  - iPadOS<sup>®</sup>
    12.1+; iPad
    Pro<sup>®</sup> 3rd
    generation
    (2018)<sup>1</sup>
  - Android 8+<sup>2</sup>
  - Chrome OS®

<sup>1</sup>For complete HID keyboard and mouse support, iPadOS 13+ is recommended <sup>2</sup>DeX Mode is only supported on Samsung Galaxy S8, S8+, S9, S9+, and Note 8, Note 9, and Tab S4 for extended screen; other Android devices support mirror screen



## **Specifications**

Function	GUD3C04PWRKIT	Dimensions	GUD3C04PWRKIT
Upstream Port		Physical Properties	
USB-C	1x USB-C for laptop, 1x USB-C for smartphone; data rate up to 5Gbps	Case Dimension	10x 8x 6 in.
Downstream Port		Case Weight	2.3 lb.
НОМІ	1x HDMI 1.4b compliant, up to 4K UHD 3840 x 2160 @30Hz resolution (4K laptops); up to 1080p (smartphones and tablet sources)	Case Qty	1
USB-A	2x USB-A 3.1 Gen 1, data rate up to 5Gbps		
USB-C	1x USB-C for Power Delivery Pass-Thru		
Power Consumption	5V/3A (15W)		
Operating System Requirements			
Mac	MacOS X 10.12+		
Windows	Windows 10 (32/64 bit)+		
Android	Android 8+		
ios	iPadOS 12.1+; iPad Pro 3rd generation (2018) for full HID keyboar and mouse support		
Chrome OS	Chrome OS		
Environment			
Humidity	0?80% RH, Non-condensing		
Operation Temperature	32 - 104°F (0?40°C)		
Storage Temperature	-4 - 140°F (-20?60°C)		