

GUD3C11

USB-C Triple Video Docking Station with 120 Watt Power Supply (TAA Compliant)



- Dock and expand your USB-C laptop with 11 port options
- Connect up to 3 HD 4K displays via 2 DisplayPorts, 1 HDMI port*
- Keep your laptop charged with up to 60W Power Delivery
- 2x DisplayPort++ 1.2 ports support dual displays to 4K @ 60Hz
- 1x HDMI port with DP Alt Mode supports HD display to 4K @ 30Hz

Triple Video USB-C Docking Station Packed With Features

IOGEAR TAA Compliant USB-C Triple Video Docking Station is designed to transform your USB-C laptop into a full-featured workstation that rivals a desktop. The Dock is equipped with 11 port options to add devices like a full-sized keyboard and mouse, an external hard drive, printer, webcam, a speaker set, and more via a single USB-C cable. Connect up to three monitors* through the Triple Video Dock to expand your visual workspace.


Triple 4K Ultra-HD Monitor Setup

Enjoy the remarkable visual experience of 4K Ultra HD (UHD), at four times the resolution of standard HD. The Dock supports impressive, Cinema 4K quality on a single DisplayPort monitor to 4096 x 2160 @60Hz for enhanced enjoyment while watching videos, playing games, working and creating. Attach dual 4K UHD DisplayPort screens and add a third 4K UHD HDMI display for crystal clear images and video quality to 3840 x 2160 @60Hz across all three.

- Dock and expand your USB-C laptop with 11 port options
- Connect up to 3 HD 4K displays via 2 DisplayPorts, 1 HDMI port*
- Keep your laptop charged with up to 60W Power Delivery
- 2x DisplayPort++ 1.2 ports support dual displays to 4K @ 60Hz
- 1x HDMI port with DP Alt Mode supports HD display to 4K @ 30Hz
- 1x USB-C port offers fast data transfer rates to 5Gbps
- 2x USB 3.0 ports with one BC1.2 fast charging port
- 2x USB 2.0 ports; 1x Gigabit Ethernet port
- 2x 3.5mm audio ports for a headphone and microphone
- TAA Compliant

* Requires installation of DisplayLink driver



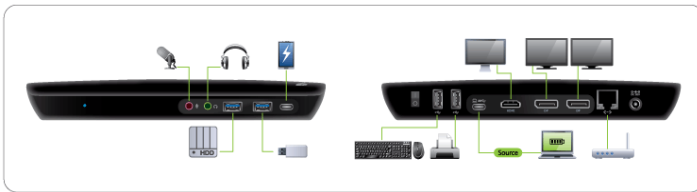

Requirements

Package Contents

Host device requirements

- USB-C 3.0 or 3.1(Thunderbolt 3 compatible) device with DP Alt Mode Support
- USB-C with USB mode can only support up to 2 monitors

- 1 x GUD3C11
- 1 x 120W AC power adapter
- 1 x 3.3ft USB Type-C to Type-C cable
- 1 x Driver CD
- 1 x Quick Start Guide
- 1 x Warranty card

OS requirements

- Windows 7/8/8.1/10/11
- Mac OS X 10.10+
- Chrome OS
- Ubuntu
- DisplayLink Driver installation (<http://www.displaylink.com/downloads>)
- Host computer USB-C port must support USB Power Delivery 2.0 for charging function

Notes for M1 Mac Users: For M1 Mac Users, please check DisplayLink website for latest Mac Displaylink driver: <http://www.displaylink.com/downloads/macOS>

Specifications

Function	GUD3C11
Upstream Port	
USB-C	USB 3.1 Gen 1 5Gbps, with Power Delivery up to 60W
Downstream Port	
Audio In	1x 3.5mm audio port
Audio Out	1x 3.5mm audio port
DisplayPort	2x DisplayPort with up to 4K@60Hz (3840x2160)
Ethernet	1x Gigabit Ethernet
HDMI	1x HDMI with DP Alt Mode, supports up to 4K@30hz (3840x2160)
USB-A	2x USB 3.0; 2x USB 2.0
USB-C	1x USB 3.1 Gen 1
Power Adapter	External 120W AC Adapter
Operating System Requirements	
Mac	Mac OS X 10.10+ ~ 10.13.3
Windows	Windows 7 / 8 / 8.1 / 10
Environment	
Humidity	
Operation Temperature	
Power	
Power Delivery Pass-Thru	Power Delivery Pass-through up to 60W
Protocols	HDCP 2.2, DisplayPort Alt Mode

Dimensions	GUD3C11
Unit Dimensions	
Height	3.54" (9cm)
Length	8.86" (22.5cm)
Depth	1.18" (3cm)
Inner Pack	
Height	12.8" (32.5cm)
Length	12.8" (32.5cm)
Width	10.39" (26.4cm)
Inner Pack Qty.	3
Unit Package Dimensions	
Height	3.27" (8.3cm)
Length	12.6" (32cm)
Width	5.31" (13.5cm)
Master Carton	
Height	11.22"
Width	13.78"
Depth	12.6"
Master Carton Qty.	6
Weight	
Master Carton Wt.	19.47lb (8.83kg)
Inner Pack Wt.	9.06lb (4.11kg)
Unit Pack Wt.	2.6lb (1.18kg)
Unit Wt.	0.8lb (0.36kg)