

GUH3C3PD

USB-C 4K Dock with PD

- 4K HDMI Video Resolution (3840 x 2160 @30Hz)
- USB-C port (5Gbps)
- USB 3.0 Type-A port (5Gbps)
- Charges your laptop via USB-C charger (60W)
- Gigabit Ethernet LAN port



USB-C to 4K HDMI, GbE, USB Type-A and USB-C w/ Power Charging Pass-Thru

The USB-C 4K Dock with PD expands an USB-C port to an Ethernet network connection, 4K HDMI port, USB Type-A port plus an USB-C expansion port for data or power charging. This all-in-1 adapter enables your USB-C or Thunderbolt™ 3 computer to connect to a HDMI monitor for crisp and sharp 4K images. Perfect for professionals in the minimalistic SOHO environments and on-the-go.

1. USB-C Power Charging Pass-Thru

There is no need to worry about running out of power while using your USB-C port. Connect your laptop's original USB-C charger to the multiport adapter and charge your laptop while you work or play. Providing up to 60w of power delivery, your laptop will charge at the fast rate you expect from USB-C. When you are not charging your laptop, you can use the USB-C port to plug in any cutting edge USB-C devices.

- 4K HDMI Video Resolution (3840 x 2160 @30Hz)
- USB-C port (5Gbps)
- USB 3.0 Type-A port (5Gbps)
- Charges your laptop via USB-C charger (60W)
- Gigabit Ethernet LAN port

- Works with USB-C and Thunderbolt 3 computers


* Power Delivery pass-through requires USB-C charger from your laptop. A total of up to 52.5W can be charged to the laptop after deduction of 7.5W is used by the dock.

** Pass-thru power delivered to the laptop is dependent upon the capacity of your USB-C power supply.

Ex. If your USB-C power supply is 60W, then the maximum power can be delivered to the laptop is $60W - 7.5W = 52.5W$.

Regardless of the capacity of your USB-C power supply, the maximum power can be delivered to your laptop is 52.5W.



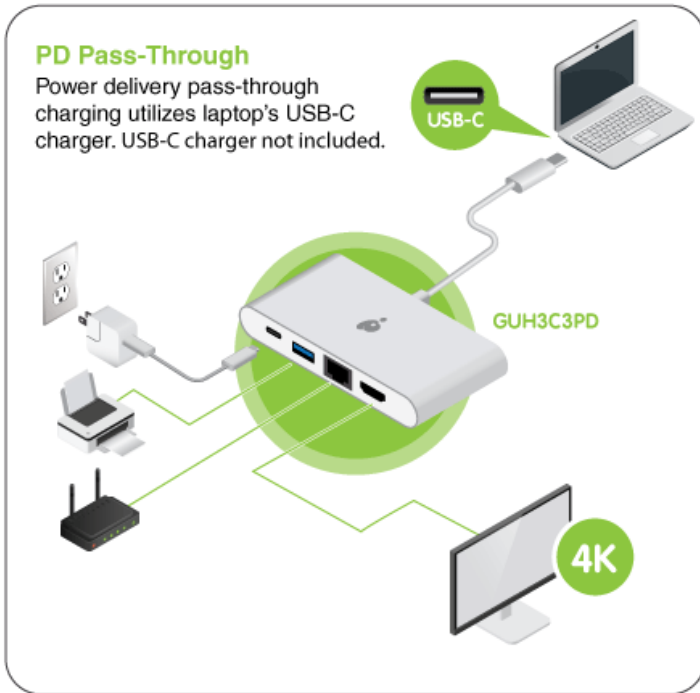

Requirements

Package Contents

- **Computer:**
 - USB-C port
 - Windows[®] 7, Windows[®] 8, Windows[®] 8.1, Windows[®] 10,
 - Mac OS[®] X 10.7+
- 1 x GUH3C3PD
 - 1 x Warranty Card

Specifications

Function	GUH3C3PD	Dimensions	GUH3C3PD
Upstream Port		POP Information	
USB-C	Built-in USB 3.1 G1 Type-C cable	10" Peg Hook	8
Downstream Port		6" Peg Hook	5
USB-A	1 x USB-A 3.0	Unit Dimensions	
USB-C	1 x USB-C for Power Delivery Pass-through or data transfer	Height	8.27" (21cm)
HDMI	1 x HDMI (v1.4) Up to 3840x2160 @ 30Hz	Length	4.06" (10.3cm)
Ethernet	Gigabit Ethernet	Depth	0.63" (1.63cm)
Power		Inner Pack	
Power Delivery Pass-Thru	60W (A total of up to 45W can be charged to the laptop after deduction of max 15W used by the dock)	Height	6.22" (15.8cm)
Operating System Requirements		Length	7.74" (19.65cm)
Windows	Windows 7/8/8.1/10	Width	5.71" (14.5cm)
Mac	Mac OS X 10.7+	Inner Pack Qty.	6
		Unit Package Dimensions	
		Height	5.70" (14.5cm)
		Length	5.31" (13.5cm)
		Depth	1.18" (3cm)
		Master Carton	
		Height	12.20"
		Width	16.14"
		Depth	6.9"
		Master Carton Qty.	24
		Weight	
		Master Carton Wt.	8.38lb (3.8kg)
		Inner Pack Wt.	1.76 lb (0.80kg)
		Unit Pack Wt.	0.29 lb (0.12kg)
		Unit Wt.	0.26 lb (0.09kg)