

GUV322

UpStream Pro Dual Video Capture Adapter (TAA Compliant)



- Capture & mix two (2) unencrypted live 4K videos at 1080p
- Connects to your streaming desktop, laptop or mobile device via USB 3.1
- Operate via smartphone app, control adapter via Bluetooth wireless
- **Free** Android/iOS UpStream Essentials App lets you control & select scenes, customize live streams including NEW UpStream Command Center feature to create up to 18 hot key buttons to control your broadcast to control OBS or other streaming software
- Broadcast-level finish - Picture-in-Picture (PIP) & split screen options


Broadcast-Level AV Capture, Mix, Effects & Control for Live Streaming

Capture and create customized, high-quality video with professional effects from multiple sources and control your program via a smartphone with the TAA Compliant UpStream™ Pro Dual Video Capture Adapter. Along with the FREE UpStream™ Essentials App, you'll get the essential pro tools needed to create a customized, broadcast-level video finish in real-time that's ready to stream.

The UpStream Pro Dual Video Capture Adapter is perfect for adding a professional-level finish to your videos, taking them to the next level.

- Capture & mix two (2) unencrypted live 4K videos at 1080p
- Connects to your streaming desktop, laptop or mobile device via USB 3.1
- Operate via smartphone app, control adapter via Bluetooth wireless
- **FREE** Android/iOS UpStream Essentials App lets you control & select scenes
- Customize live streams including NEW UpStream Command Center feature to create up to 18 hot key buttons to control your broadcast to control
- Broadcast-level finish - Picture-in-Picture (PIP) & split screen options
- Change backgrounds, add green screen effects with built-in chroma key tool
- Real-time video preview and program management
- Audio mixer with dual analog audio inputs
- Automatic audio transitions are ideal for podcasts & interviews
- Supports protected video switching mode for regular event usage
- Compatible with USB & Thunderbolt™ 3 (USB-C) specification
- Capture and mix 2 live HDMI video inputs to HD UVC format
- 4:4:4 HDMI Video Sampling
- YUY2, RGB output color space
- 2 x HDMI input
- 2 x RCA (L/R) input
- 1 x MIC XLR input
- 1 x HDMI PGM output
- TAA Compliant



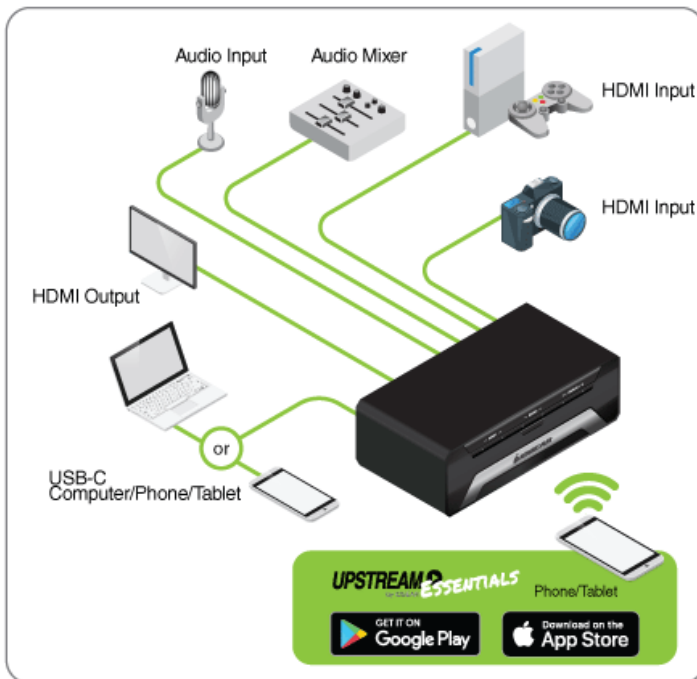

Requirements

Package Contents

- | Requirements | Package Contents |
|---|----------------------|
| • Windows 7 and above with UVC (USB Video Class) v1.1 support | 1x GUV322 |
| • Mac OSX 10.13 and above with UVC support | 1x USB-B to A Cable |
| • Android Smartphone with UVC support* | 1x USB-B to C Cable |
| • System requirements: | 1x Quick Start Guide |
| • CPU: Intel® Core™ i3 2.8 GHz or higher | 1x Tripod Mount |
| • Memory: 4GB or more | 1x Warranty Card |
| • One USB-A or USB-C 3.1 port | |
| • Stream software with UVC device support | |
| • UpStream Essentials App: iOS 11+, Android 5+ | |
| • Stream Software Support*: | |
| • Youtube, Facebook, and Twitch | |
| • OBS: https://obsproject.com | |
| • Xsplit: https://www.xsplit.com | |

Specifications

| Function | GUV322 | Dimensions | GUV322 |
|--------------------------------------|--|--------------------------------|---------------------|
| Connectors | | Unit Dimensions | |
| Audio Input | 1x MIC XLR 1x RCA (L/R) | Height | 1.6" |
| USB | 1x USB Type-B for host computer | Length | 5.6" |
| Video Input | 720p50, 720p60, 1080p24, 1080p25, 1080p30, 1080p50, 1080p60, 2160p24, 2160p25, 2160p30 | Depth | 5.07" |
| Video Output | UVC Capture Enabled: 720p50, 720p60, 1080p24, 1080p25, 1080p30, 1080p50, 1080p60 (HDCP disabled) UVC Capture Disabled: 720p50, 720p60, 1080p24, 1080p25, 1080p30, 1080p50, 1080p60, 2160p24, 2160p25, 2160p30 (HDCP enabled) | Unit Package Dimensions | |
| Video connections | | Height | 10.5" |
| Input | 2x HDMI inputs (Up to 4K@30) | Length | 3.8" |
| Output | 1x HDMI PGM output 1080P | Width | 8.8" |
| Power | | Master Carton | |
| Input Rating | DC Jack with Power cable IEC C14, 100-240 Vac (w/250V fuse) | Height | 11" |
| Video capture size | | Width | 12.3" |
| Operating Temperature | 0 - 40 °C | Depth | 9.6" |
| Storage Temperature | -20 ? 60 °C | Master Carton Qty. | 3 pc |
| Humidity | 0 - 80% RH, Non-Condensing | Weight | |
| Operating System Requirements | | Master Carton Wt. | 11.41 lbs (5.18 kg) |
| Other | PC/Mac: ? CPU: Intel® i3 Dual Core 2.8Ghz or higher ? RAM: 4GB or more One USB-C Interface or USB-A Interface Android smartphone with UVC and USB-C | Unit Pack Wt. | 3.45 lbs (1.56 kg) |
| | | Unit Wt. | 1.50 lbs (0.68 kg) |