

GWLRDVITX

Ultra Long Range Wireless DVI Transmitter



600ft - Wireless DVI Transmitter

The Ultra Long Range Wireless DVI Transmitter is the latest addition to IOGEAR's extensive and award winning Wireless Video lineup. Wirelessly transmit A/V signals from your source device such as PC to a display or projector at never before possible distances of up to 600ft (183m) line of sight.

Versatile Sources and Displays Combination

This wireless DVI Transmitter works with receivers with HDMI output (GWLRHDRX, sold separately), or receivers with DVI output (GWLRDVIRX, sold separately).

** Ideal for application with mixed DVI and HDMI displays.


Cut the Cord and Cut the Cost

With support for HD resolutions up to 1080p, you can cut the video cables without sacrificing picture quality paired with a receiver with HDMI out (GWLRHDRX, sold separately), or a receiver with DVI out (GWLRDVIRX, sold separately). Enjoy a stunning video experience with the convenience of wireless and the flexibility to network your environment the way you want without investing in expensive wiring. Effectively eliminate cable clutter and transmit powerful long range digital signals across wide open spaces, up to 600ft. No need to run expensive video cables at long distances.

- Transmits High Definition Video from up to 600ft away
- Supports resolutions of up to 1080p @ 60fps

- Plug-N-Play solution
- Mix & Match between DVI, HDMI receivers
- Perfect for retail and commercial applications



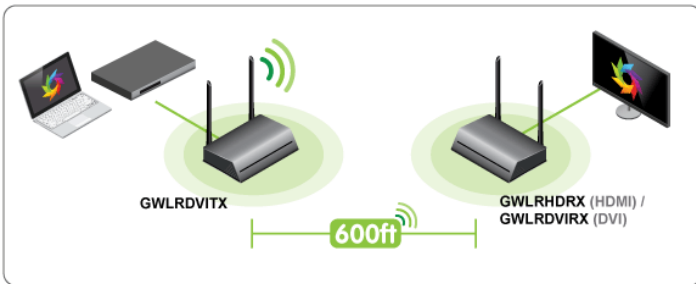

Requirements

- **Display**
- Display or Projector with DVI, or HDMI Input
- **Media Source**
- 1 DVI Output

Package Contents

- 1 x Ultra Long Range Wireless Transmitter with DVI
- 1 x DVI Cables
- 1 x Power Adapter
- 1 x Quick Start Guide
- 1 x Warranty Card

Note: GWLRDVIRX is required for displays with DVI input; GWLRHDRX is required for displays with HDMI input.

Specifications

Function	GWLRDVITX	Dimensions	GWLRDVITX
Connectors		Unit Dimensions	
Video Input	DVI	Height	1.75 in
Power	1 x Power Jack	Depth	4.50 in
Video Resolution		Unit Package Dimensions	
Video Resolution	1920x1080@60Hz;1680x1050@60Hz;1440x900@60Hz; 1360x768@60Hz;1280x1024@60Hz;1280x960@60Hz; 1280x720@60Hz;1024x768@60Hz;800x600@60Hz	Width	10.25 in
Video Streaming	<200ms Latency H.264	Height	6.25 in
Frequency	5 GHz	Depth	3.75 in
Antenna Type	Dual Hi Gain 5 DBi	Master Carton	
Operating Range	Up to 600 ft	Width	11 in
Housing		Height	14.50 in
Case	Metal	Depth	13 in
Power		Master Carton Qty.	6
Amps	3 A	Weight	
Voltage	5 V	Master Carton Wt.	15.95 lb
Warranty	1 Year	Unit Wt. w/accessories	2.50 lb
Operating Temperature	32 - 140 F	Unit Wt.	1.35 lb
Power Consumption	< 10 W		
Humidity	10 - 95% Non-Condensing		