

GWLRHDRX

## Ultra-Long-Range Wireless Video Receiver



### Wireless Video Up to 600 ft.

The Ultra Long-Range Wireless Video Receiver is connected to an HDMI-enabled TV, sending wireless A/V signals from your source device such as PC or Blu-ray player via the wireless transmitters (GWLRHDTX with HDMI-connector, GWLRDVITX for DVI, GWLRVGATX for VGA, all sold separately), at distances of up to 600 ft (183m) line of sight.

### Versatile Sources and Display Combinations


This wireless video receiver works with transmitters with HDMI output connection (GWLRHDTX, sold separately), VGA (GWLRVGATX, sold separately), or DVI output (GWLRDVITX, sold separately). \*\* Ideal for application with mixed sources.

### Control Source Device Remotely - Infrared (IR) Support

The included IR blast cable and IR extension cable allows you to control your source device remotely. Signal transmission between your remote and audio / video equipment is activated by simply pointing your remote control at the receiver and pressing the remote control's button. This feature only works with a video transmitter (GWLRHDTX).

- Receives High Definition Video from up to 600 ft. away
- Supports resolutions of up to 1080p @ 60fps
- Plug-N-Play solution
- Mix & Match between DVI, HDMI and VGA transmitters
- Perfect for retail and commercial applications
- Supports Infrared (IR) Remote signal transmission to control source device



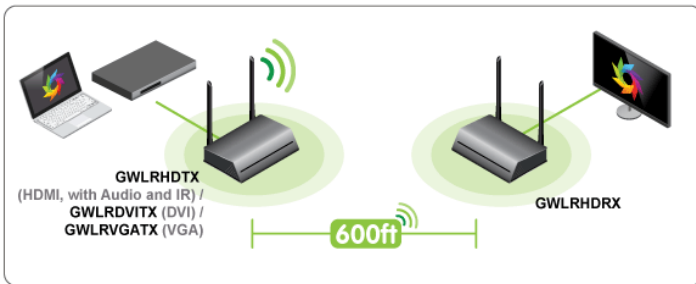

**Requirements**

- Display
- Display or Projector with HDMI Connector Input
- Media Source
- 1 HDMI, or DVI, or VGA Output

**Package Contents**

- 1 x Ultra Long Range Wireless Receiver with HDMI
- 1 x HDMI Cables
- 1 x Power Adapter
- 1 x IR Extension Cable
- 1 x Quick Start Guide
- 1 x Warranty Card

Note: GWL RDVITX is required for sources with DVI output; GWL RVGATX is required for sources with VGA output; GWL RHDTX is required for sources with HDMI connector output.  
 \*IR is only supported between receivers and transmitter with HDMI connection, will not support receivers and transmitters with VGA or DVI connections.  
 \*\*Only video is transmitted with DVI receivers.

## Specifications

Function	GWLRHDRX	Dimensions	GWLRHDRX
<b>Connectors</b>		<b>Unit Dimensions</b>	
Video Output	HDMI Output Connection	Height	1.75 in
Power	1 x Power Jack	Depth	4.50 in
<b>Video Resolution</b>		<b>Unit Package Dimensions</b>	
1920x1080@60Hz;1680x1050@60Hz;1440x900@60Hz; 1360x768 @60Hz;1280x1024@60Hz;1280x960 @60Hz; 1280x720@60Hz;1024x768@60Hz;800x600@60Hz		Length	7.63 in
<b>Video Streaming</b>		<b>Unit Package Dimensions</b>	
<200ms Latency H.264		Width	10.25 in
<b>Audio</b>		Height	6.25 in
Audio Output	L/R Stereo Audio	Depth	3.75 in
Codec	PCM	<b>Master Carton</b>	
<b>Frequency</b>	5GHz	Width	11 in
<b>Antenna Type</b>	Dual High Gain 5 DBi	Height	14.50 in
<b>Operating Range</b>	Up to 600 ft	Depth	13 in
<b>Infrared</b>		Master Carton Qty.	6
Frequency	20-60HZ	<b>Weight</b>	
<b>Housing</b>		Master Carton Wt.	16.20 lb
Case	Metal	Unit Wt. w/accessories	2.50 lb
<b>Power</b>		Unit Wt.	1.35 lb
Amps	3 A		
Voltage	5 V		
<b>Warranty</b>	1 Year		
<b>Operating Temperature</b>	32 - 140 F		
<b>Power Consumption</b>	6.5 W		
<b>Humidity</b>	10 - 95% Non-Condensing		