

GWLRHDTX

Ultra-Long-Range Wireless Video Transmitter



600 ft. - Wireless Transmitter

The Ultra-Long-Range Wireless Video Transmitter is the latest addition to IOGEAR's extensive and award winning Wireless Video lineup. Wirelessly transmit A/V signals from your source device such as PC or Blu-ray player to a display or projector at never before possible distances of up to 600 ft. (183m) line of sight.

Versatile sources and displays combination


This wireless Transmitter works with receivers with HDMI connection (GWLRHDXR), or DVI output (GWLRDVIRX). ** Ideal for application with mixed DVI and HDMI displays.

Control Source Device Remotely - Infrared (IR) Support

The included IR blast cable and IR extension cable allows you to control your source device remotely. Signal transmission between your remote and audio / video equipment is activated by simply pointing your remote control at the receiver and pressing the remote control's button. This feature only works with a wireless receiver (GWLRHDXR).

- Transmits High Definition Video for up to 600ft away
- Supports resolutions of up to 1080p @ 60fps
- Plug-N-Play solution
- Mix & Match between DVI and HDMI receivers
- Perfect for retail and commercial applications
- Supports Infrared (IR) Remote signal transmission to control source device, with HDMI receivers only
- HDCP Compliant



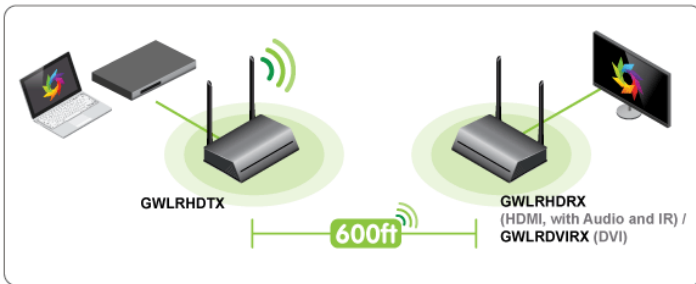

Requirements

- Display
- Display or Projector with HDMI or DVI Connector Input
- Media Source
- 1 HDMI Connector Output

Package Contents

- 1 x Ultra Long Range Wireless Transmitter with HDMI
- 1 x HDMI Cables
- 1 x Power Adapter
- 1 x IR Blast Cable
- 1 x Quick Start Guide
- 1 x Warranty Card

Note: GWLRDVIRX is required for displays with DVI input; GWLRHDRX is required for displays with HDMI connector input.
 *IR is only supported between receivers and transmitter with HDMI connection, will not support receivers and transmitters with VGA or DVI connections.
 **Only video is transmitted with DVI receivers or transmitters.

Specifications

Function	GWLRHDTX	Dimensions	GWLRHDTX
Connectors		Unit Dimensions	
Power	1 x Power Jack	Height	1.75 in
Video Input	HDCP Support	Depth	4.50 in
Video Resolution	1920x1080@60Hz;1680x1050@60Hz;1440x900@60Hz; 1360x768 @60Hz;1280x1024@60Hz;1280x960 @60Hz; 1280x720 @60Hz;1024x768@60Hz;800x600@60Hz	Length	7.63 in
Video Streaming	<200ms Latency H.264	Unit Package Dimensions	
Audio		Width	10.25 in
Audio Output	L/R Stereo Audio	Height	6.25 in
Codec	PCM	Depth	3.75 in
Frequency	5 GHz	Master Carton	
Antenna Type	Dual High Gain 5 DBi	Width	11 in
Operating Range	Up to 600 ft	Height	14.50 in
Infrared		Depth	13 in
Frequency	20-60HZ	Master Carton Qty.	6
Housing		Weight	
Case	Metal	Master Carton Wt.	16.20 lb
Power		Unit Pack Wt.	2.50 lb
Amps	3 A	Unit Wt.	1.35 lb
Voltage	5 V		
Warranty	1 Year		
Operating Temperature	32 - 140 F		
Power Consumption	9W		
Humidity	10 - 95% Non-Condensing		