

GCS1104-KM1

4 Port DVI KVMP with cables and wireless keyboard / mouse combo



GCS1104 DVI KVMP USB Switch w/ USB and audio cables

The IOGEAR DVI KVMP Switch GCS1104 charts a revolutionary new direction in KVM switch functionality by providing an interface for today's digital monitors while integrating a 4-port USB KVM switch with USB peripheral sharing capabilities.


Further details can be found here: <http://www.iogear.com/product/GCS1104/>

- Dual function KVMP / USB switch
- One console controls 4 computers
- Control your computers up to 33ft away with the reliable 2.4GHz bi-directional technology keyboard and laser mouse *
- Media Center hot keys offer quick access to your media tasks such as "My TV", playback and volume control
- Contoured laser mouse with soft rubber grips provides exceptional precision and comfort
- IOGEAR's DynaSync Technology reads and remembers the monitor's parameters (EDID) so there is no delay or change of video resolution when switching between, or booting computers**
- Independent (asynchronous) switching of KVM and peripheral USB / audio ports
- KVM is fully compliant with the USB 2.0 specification
- DVI digital and analog monitor support
- Computer selection via front panel switches or hot keys
- LED display for easy status monitoring
- Auto Scan Mode for monitoring all computers
- Complete keyboard emulation for error free booting
- Superior Video quality - 1920 x 1200 @ 60Hz; DDC2B
- Easy installation
- Hot-Pluggable - Add or remove computers for maintenance without powering down the switch
- Supports Windows and Mac host systems
- Compatible with most wireless keyboards and mice
- Firmware upgradable

*Depending on available inventory the included keyboard/mouse will be either GKM551R or GKM552R

**IOGEAR's Display Emulation Technology provides the EDID support for Windows 7



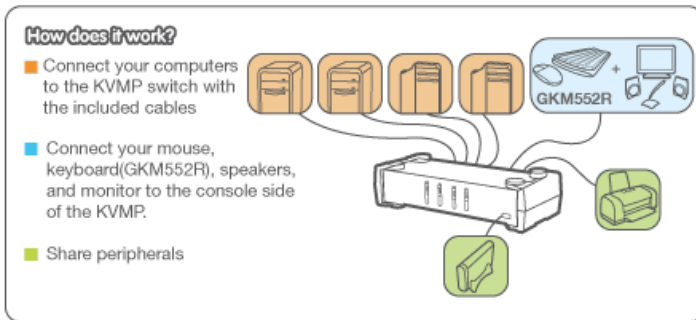

Requirements

Package Contents

- | | |
|--|---|
| <ul style="list-style-type: none"> • • Console: • DVI monitor • • Computer: • DVI port • Type "A" USB port • Audio ports • • Operating Systems: • Windows XP®, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1 • Mac OS 9 to 10.x • Oracle® Solaris • Linux® | <ul style="list-style-type: none"> • 1 x 4-Port DVI KVMP Switch • 1 x 2.4GHz Wireless Keyboard and Mouse Combo • 4 x USB DVI-D KVM Cables • 1 x Power Adapter • 1 x Installation Guide • 1 x Quick Start Guide • 2 x Warranty Card |
|--|---|

Specifications

| Function | GCS1104-KM1 | Dimensions | GCS1104-KM1 |
|-----------------------------|-------------------------------------|----------------------|-------------|
| Computer Connections | | Master Carton | |
| Direct | 4 | Width | 10in. |
| Port Selection | Front Panel Pushbutton; Hotkey | Height | 9in. |
| Connectors | | Depth | 22in. |
| Power | 1 x DC Jack | Master Carton Qty. | 1 |
| USB | 2 x USB 2.0 Type A Female | Weight | |
| Console Connectors | | Master Carton Wt. | 12lb |
| Monitor | 1 x DVI-I Female | | |
| Keyboard | 1 x USB Type A Female | | |
| Mouse | 1 x USB Type A Female | | |
| Audio | 1 x 3.5mm Mini Stereo Jack (Green) | | |
| Microphone | 1 x 3.5mm Mini Stereo Jack (Pink) | | |
| CPU Connectors | | | |
| Monitor | 4 x DVI-I Female | | |
| Keyboard & Mouse | 4 x USB Type B Female | | |
| Audio | 4 x 3.5mm Mini Stereo Jack (Green) | | |
| Microphone | 4 x 3.5mm Mini Stereo Jack (Pink) | | |
| Switches | | | |
| Port Selection | 4 x Pushbutton | | |
| LEDs | | | |
| On Line | 4 (Orange) | | |
| USB Peripherals | 4 (Green) | | |
| Emulation | | | |
| Keyboard | USB | | |
| Mouse | USB | | |
| Video Resolution | Up to 1920x1200@60Hz;DDC2B | | |
| Scan Interval | 1-99 Seconds (Default at 5 Seconds) | | |
| Power | | | |
| Voltage | DC 5.3V | | |
| Amps | 2.4A | | |
| Environment | | | |
| Operation Temperature | 0-50°C | | |
| Storage Temperature | -20-60°C | | |
| Humidity | 0-80% RH; Non-condensing | | |
| Housing | | | |
| Case | Metal | | |