

## GCS1104-KM1

## 4 Port DVI KVMP with cables and wireless keyboard / mouse combo



### GCS1104 DVI KVMP USB Switch w/ USB and audio cables

The IOGEAR DVI KVMP Switch GCS1104 charts a revolutionary new direction in KVM switch functionality by providing an interface for today's digital monitors while integrating a 4-port USB KVM switch with USB peripheral sharing capabilities.

Further details can be found here: <http://www.iogear.com/product/GCS1104/>

- Dual function KVMP / USB switch
- One console controls 4 computers
- Control your computers up to 33ft away with the reliable 2.4GHz bi-directional technology keyboard and laser mouse \*
- Media Center hot keys offer quick access to your media tasks such as "My TV", playback and volume control
- Contoured laser mouse with soft rubber grips provides exceptional precision and comfort
- IOGEAR's DynaSync Technology reads and remembers the monitor's parameters (EDID) so there is no delay or change of video resolution when switching between, or booting computers\*\*
- Independent (asynchronous) switching of KVM and peripheral USB / audio ports
- KVM is fully compliant with the USB 2.0 specification
- DVI digital and analog monitor support
- Computer selection via front panel switches or hot keys
- LED display for easy status monitoring
- Auto Scan Mode for monitoring all computers
- Complete keyboard emulation for error free booting
- Superior Video quality - 1920 x 1200 @ 60Hz; DDC2B
- Easy installation
- Hot-Pluggable - Add or remove computers for maintenance without powering down the switch
- Supports Windows and Mac host systems
- Compatible with most wireless keyboards and mice
- Firmware upgradable


\*Depending on available inventory the included keyboard/mouse will be either GKM551R or GKM552R

\*\*IOGEAR's Display Emulation Technology provides the EDID support for Windows 7



#### How does it work?

- Connect your computers to the KVMP switch with the included cables
- Connect your mouse, keyboard(GKM552R), speakers, and monitor to the console side of the KVMP.
- Share peripherals

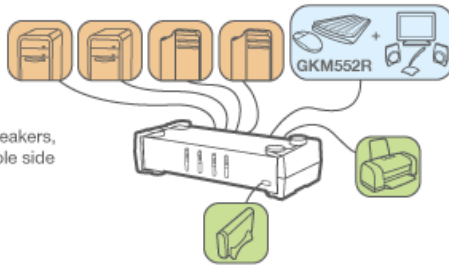

#### Requirements

- 
- **Console:**
- DVI monitor
- 
- **Computer:**
- DVI port
- Type "A" USB port
- Audio ports
- 
- **Operating Systems:**
- Windows XP®, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1
- Mac OS 9 to 10.x
- Oracle® Solaris
- Linux®

#### Package Contents

- 1 x 4-Port DVI KVMP Switch
- 1 x 2.4GHz Wireless Keyboard and Mouse Combo
- 4 x USB DVI-D KVM Cables
- 1 x Power Adapter
- 1 x Installation Guide
- 1 x Quick Start Guide
- 2 x Warranty Card

## Specifications

Function	GCS1104-KM1	Dimensions	GCS1104-KM1
<b>Computer Connections</b>		<b>Master Carton</b>	
Direct	4	Width	10in.
<b>Port Selection</b>	Front Panel Pushbutton; Hotkey	Height	9in.
<b>Connectors</b>		Depth	22in.
Power	1 x DC Jack	Master Carton Qty.	1
USB	2 x USB 2.0 Type A Female	<b>Weight</b>	
<b>Console Connectors</b>		Master Carton Wt.	12lb
Monitor	1 x DVI-I Female		
Keyboard	1 x USB Type A Female		
Mouse	1 x USB Type A Female		
Audio	1 x 3.5mm Mini Stereo Jack (Green)		
Microphone	1 x 3.5mm Mini Stereo Jack (Pink)		
<b>CPU Connectors</b>			
Monitor	4 x DVI-I Female		
Keyboard & Mouse	4 x USB Type B Female		
Audio	4 x 3.5mm Mini Stereo Jack (Green)		
Microphone	4 x 3.5mm Mini Stereo Jack (Pink)		
<b>Switches</b>			
Port Selection	4 x Pushbutton		
<b>LEDs</b>			
On Line	4 (Orange)		
USB Peripherals	4 (Green)		
<b>Emulation</b>			
Keyboard	USB		
Mouse	USB		
<b>Video Resolution</b>	Up to 1920x1200@60Hz;DDC2B		
<b>Scan Interval</b>	1-99 Seconds (Default at 5 Seconds)		
<b>Power</b>			
Voltage	DC 5.3V		
Amps	2.4A		
<b>Environment</b>			
Operation Temperature	0~50°C		
Storage Temperature	-20~60°C		
Humidity	0~80% RH; Non-condensing		
<b>Housing</b>			
Case	Metal		