

Federal Communications Commission (FCC) Statement

This product has been tested and found to comply with the limits for a Class B device, pursuant to part 15 of the FCC Rules. It is intended for use in residential setting, but may also be used in commercial or industrial setting.

CE Compliance

This device has been tested and found to comply with the following European Union directives: Electromagnetic Capability (89/336/EMC), Low Voltage (73/23/EEC) and R&TTE (1999/5/EC).

Limited Warranty

WE'RE HERE TO HELP YOU!
NEED ASSISTANCE SETTING UP THIS PRODUCT?
Make sure you:

1. Use the live chat at www.iogear.com to try and solve any issues you may be having with the product
2. Visit the Tech Info Library/FAQ on www.iogear.com (under the Support tab)
3. Call the tech support line at 1-866-946-4327 (U.S. only) or 949-453-8782

Warranty Information

This product carries a 1 Year Limited Warranty. For the terms and conditions of this warranty, please go to <http://www.iogear.com/support/warranty> or call 1-866-946-4327

Contact

Toll Free 866-946-4327 (USA)
Phone: 949-453-8782
19641 Da Vinci, Foothill Ranch, CA 92610

www.iogear.com
support@iogear.com



QuickStart Guide (For Mac) Mobile Digital Pen with Flash Drive

About Us

FUN
IOGEAR offers connectivity solutions that are innovative, fun, and stylish, helping people enjoy daily life using our high technology products.

GREEN
IOGEAR is an environmentally conscious company that emphasizes the importance of conserving natural resources. The use of our technology solutions helps reduce electronic waste.



© 2010 IOGEAR®

GPEN300
PART NO. Q1338

Package Content


- 1 x Digital Pen (Including 2 batteries)
- 1 x Receiver
- 1 x USB extension cable
- 1 x Pen&Ink Viewer (Stored on Flash Memory)
- 1 x MyScript Notes installation CD (32 bit system only)
- 1 x Quick Start Guide
- 1 x Warranty Card
- 1 x Software CD and User Manual (Windows OS only)

Device Overview

Start Here!

The 1GB Flash Memory Receiver

1. On / Off
2. Pause
3. USB Cap
4. Microphone
5. Reset Button

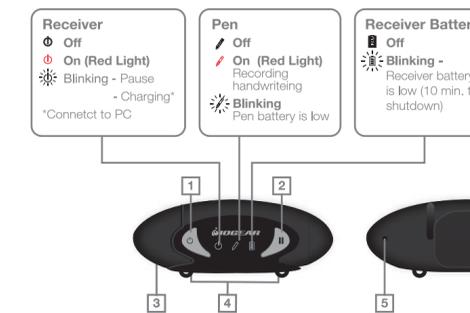

Important: Do not format the receiver. If a user accidentally formatted the receiver, please visit IOGEAR Support/Drivers & Manuals section to download the software.

1

- ### The Digital Pen
1. Pen Tip
 2. Rubber Grip
 3. Left Button
 4. Right Button



Driver Installation

For Mac users, users do not need to install the driver. Mac will automatically recognize the device as a HID device. However, Mac users need to install MyScript Notes to convert handwritten notes to text.

MyScript Notes Full Version OCR (Optical Character Recognition) software is only needed if you wish to convert your handwritten notes to text for use in e-mail or a word processor. The software also contains the training section for users to increase the handwriting conversion rate.

Hardware Installation

Charge

Prior to using the receiver and digital pen, please charge the receiver for 6 hours.



Remove clear plastic film

Initial use of the pen

1. The digital pen comes with two batteries (Standard 393 watch batteries) already inserted.
2. Remove the cap in the back of the pen.
3. Remove the small isolator strip from the battery compartment, as depicted in the picture



2

Creating Notes

Creating Notes While in Mobile Mode

While in mobile mode, you can store all your handwritten notes into the Receiver. Press the "Power" button until the Power LED turns on and stops flashing. Press the clip as shown in the pictures and center the Receiver at the top of the page. To add a new page, open the clip, change the sheet of paper and return the Receiver back to its previous location. A "new page" will be created automatically.

Step 1



Push Clip

Step 2



Insert Paper

While writing, make sure the line of sight between the Pen and the Receiver remains clear. Keep your fingers away from the crystal cone at the lowest part of the pen



3

Viewing / Editing Notes

Viewing the notes

The Pen&Ink Viewer is an application stored in the flash memory. This application does not need to be pre-installed on any computer. When you wish to View the notes, connect the receiver to your Mac.

1. Select "NoteStorage"
2. Click "PenInkViewer" folder



3. Select "Viewer_for_Mac"



4. Double click "PenInkViewer" to launch the Pen&Ink Viewer
- The Pen&Ink Viewer will allow users to save and e-mail their notes as PDF file.



Editing the notes (MyScript Notes Installation)

MyScript Notes enables users to convert personal handwriting to text. Insert the installation CD and follow the below instructions

4

Editing the notes (MyScript Notes Installation)

MyScript Notes enables users to convert personal handwriting to text. Insert the installation CD and follow the below instructions

1. Open the CD by double click the CD icon
2. Double click "Installer for Mac" folder



3. Double click "MyScriptNotes3" zip file. The system will unzip the file automatically.



4. Once the system finished unzipping the file, please double click the "MyScriptNotes3" folder
5. Double click "MyScriptNotes3.mpkg" to install the application.



Manual > Applications > MyScript Notes 3

User will be asked to type in the license key when use the application for the first timen. The license key (S/N) is on the back of the Installation CD sleeve.

5

MyScript Notes Operation

Use MyScript Note software to edit your notes. Simply connect the receiver to your Mac and then launch the MyScript Note program. Select the notes you want to edit from flash memory receiver. You can convert the note into image file (JPG) or doc/text file. For more information, users can follow CONVERSION section by clicking HELP

In order to improve the handwriting conversion accuracy, it is strongly recommended that users go through the "MyScript Trainer" which comes with the software.

Mac > Vision Objects > MySript Notes 3 > MyScript Trainer

Dictionary Function

This additional tool allows you to create your own personal dictionary. This results in you not having to write down the entire word, once programmed the your key words will "auto populate" for you. For example: When you write IO you can instruct the pen to write IOGEAR automatically.

Preferences > Dictionary > Auto replacements

When you are ready to adopt more advanced features, be sure to visit: www.iogear.com

Inkwell Operation

Mac OS X comes with built-in handwriting recognition technology called Inkwell (or Ink). If you connect GPEN300 to your Mac, you can write on the paper using the digital pen, and Inkwell translates what you write to typed words in your document. Some applications allow you to enter text directly (i.e. Microsoft Office); with others, you first enter the text into a "scratch pad" (where you can edit or revise it) before bringing it into the application. It also understands English, French, and German.

Mac users need to enable the Inkwell function.

Mac > Applications > System Preferences > Hardware > Ink

Deleting Notes

Please follow the below steps to delete the notes.

1. Plug the receiver to the PC/Mac
2. Make sure the receiver is in the "Storage Mode"
3. Open the USB drive by double click the "Digital Pen and USB Flash Device"
4. Double click "My Notes" folder
5. Select the notes that user wishes to delete and press Delete key from the keyboard

Important: Once users delete the note, the note will not be able to be recovered.

6

Mouse Mode

When in Mouse Mode, users are not able to access the receiver's flash memory. To return to Mass Storage Device, press the "Power" button again.

How to use the digital pen as a mouse in on-line mode

Function	How to use
Hovering*	Activate the pen by tapping on the surface or by pressing the lower pen button.
Click	Tap the pen on the surface or press the lower pen button
Double Click	Tap the pen twice on the surface or press the lower pen button twice
Right Click	Press the upper pen button

*The pen will hover without having to tap again or press the lower pen button for about 25 seconds.

Replacing the Digital Pen batteries

1. Remove the cap
2. Pull out battery tray
3. Remove the old batteries and insert new batteries



Replacing the ink cartridge

1. Remove the ink refill by using tweezers (not included) to pull on the tip.
2. Insert a new cartridge in its place (Standard Mini Ballpoint ink refill)



7